

# TX-6065W60FC120-NUVEZG-A01

## PRODUCT SPECIFICATION

### Features:

- ◆ Excellent transiting heat from LED chip operating under 4.0 A.
- ◆ Provide uniform cross distribution of positive white and warm white dual color scheme, mixed pure.
- ◆ High luminous output.
- ◆ No UV.
- ◆ Encapsulated materials are environmentally certified and meet environmental requirements.

### Chip Material:

- ◆ GaN


### Emitting Color:

- ◆ White

### Applications:

- ◆ Auxiliary lighting
- ◆ Ambient lighting
- ◆ Architectural lighting

**Package Dimensions:**

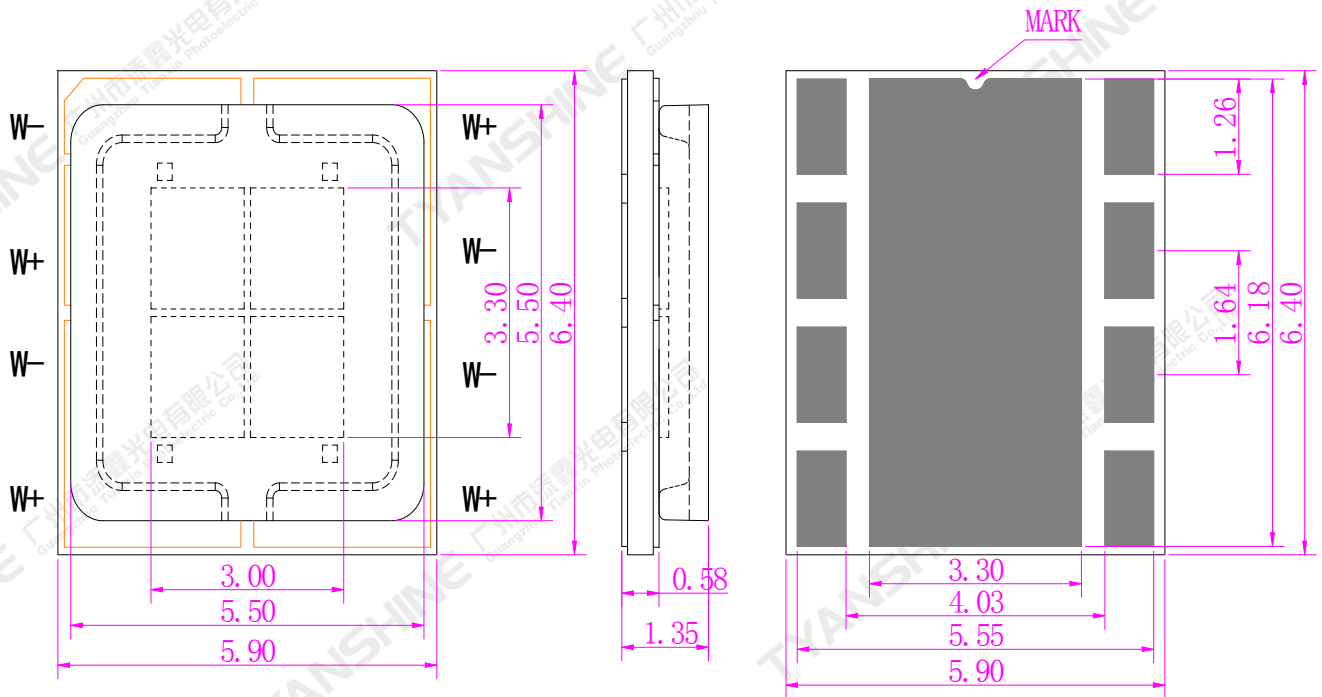

**Notes:**

- 1.All dimensions are in millimeters .
- 2.Tolerances unless otherwise mentioned are  $\pm 0.1\text{mm}$  .

Part No.	TX-6065W60FC120-NUVEZG-A01	Spec No.	WKF-BF0214	Page	2 of 9
----------	----------------------------	----------	------------	------	--------

**Absolute Maximum Ratings (Tc=25°C)**

Parameter	Symbol	Ratings	Unit	
Forward Current	IF	4000	mA	
Reverse Voltage	VR	Not designed for reverse operation	V	
Power Dissipation	PD	W1	14.4	W
		W2	14.4	
		W3	14.4	
		W4	14.4	
Junction Temperature	Tj	150	°C	
Electrostatic Discharge Threshold (ESD)	ESD	2000	V	
Storage Temperature	Tstg	-40~+70	°C	
Operation Temperature	Topr	-30~+100		

**Notes:**

- Specifications are subject to change without notice.
- The data on this specification is for reference only and the actual data is in accordance with the acknowledgment.
- Precautions for ESD:  
STATIC SHIELD Electricity and surge damages the LED. It is recommended to use a wrist band or anti-electrostatic glove when handling the LED. All devices, equipment and machinery must be properly grounded.

**Electrical Optical Characteristics (Tc=25°C)**

Parameter	Symbol	Condition	Emitting Color	Min.	Typ.	Max.	Units
Luminous Flux	$\Phi_v$	If=4.0A	W1	650	750	—	lm
			W2	650	750	—	
			W3	650	750	—	
			W4	650	750	—	
Forward Voltage	$V_f$		W1	3.2	3.4	3.6	V
			W2	3.2	3.4	3.6	
			W3	3.2	3.4	3.6	
			W4	3.2	3.4	3.6	
Correlated Colour Temperature	CCT	If=1.0A	—	6000	6720	7000	K
Reverse Current	$I_R$	—	—	—	—	2	$\mu A$
Viewing Angle at 50% IV	$2\theta_{1/2}$	—	—	—	120	—	Deg
Thermal Resistance Junction to Case	$R\theta_{J-C}$	—	—	—	0.35	—	K/W
Temperature Coefficient of Voltage	$V\Delta F/T$	If=4.0A	—	—	-2.5	—	mV/°C


**Notes:**

- 1.Luminous intensity is measured with a light sensor and filter combination that approximates the CIE eye-response curve.
2. $\theta_{1/2}$  is the off-axis angle at which the luminous intensity is half the axial luminous intensity.
- 3.Luminous flux measurement tolerance:±15%.
- 4.Forward voltage measurement tolerance:±0.15V.


## Typical Electrical/Optical Characteristics Curves



(25°C Ambient Temperature Unless Otherwise Noted)

Forward Current VS. Forward Voltage

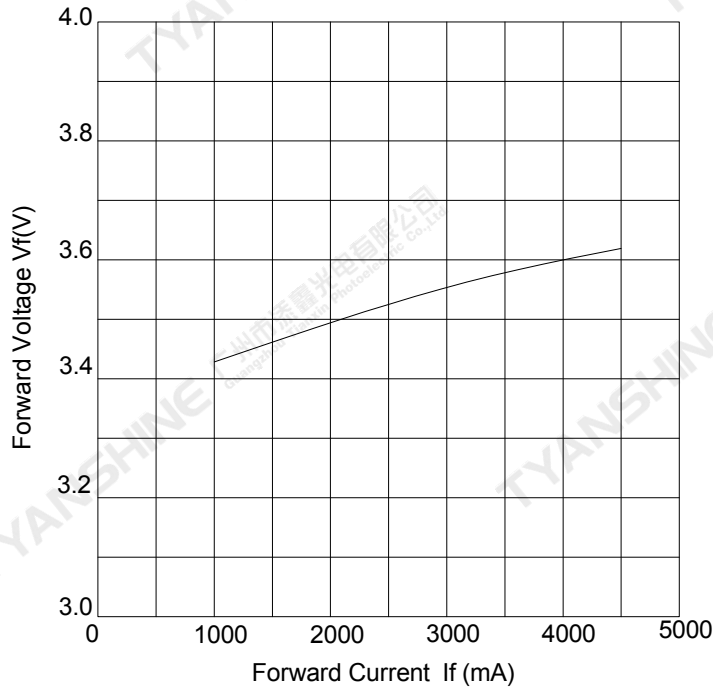


Forward Current VS. Luminous flux

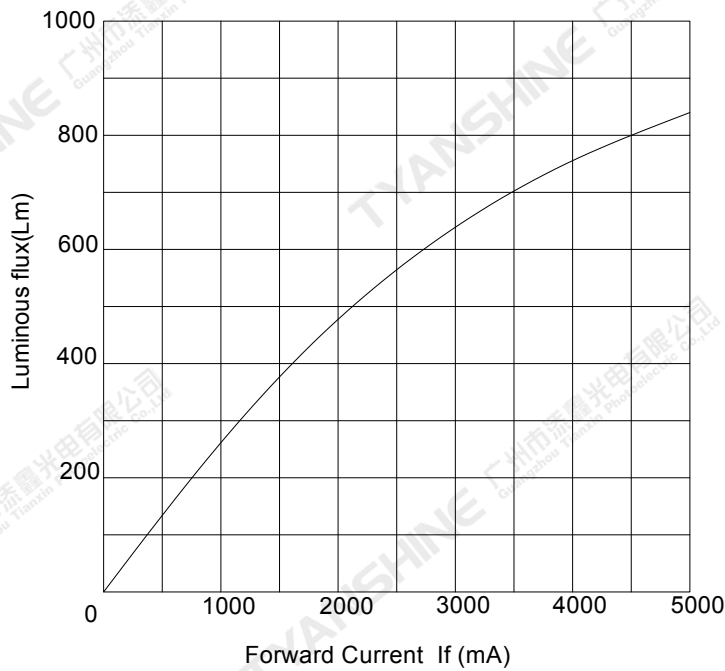


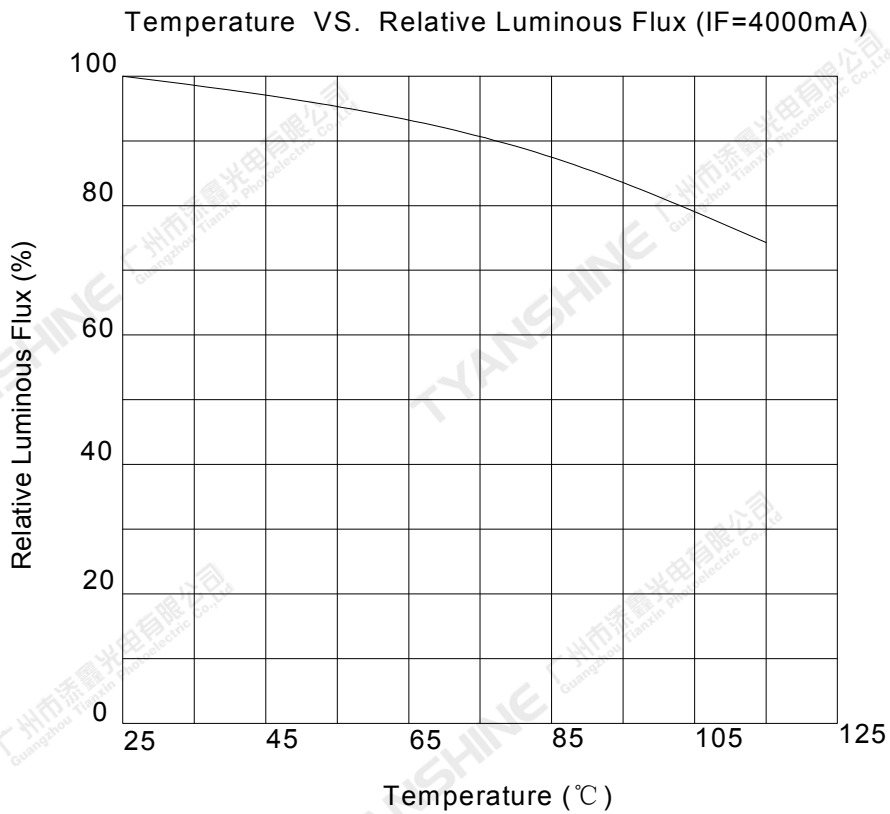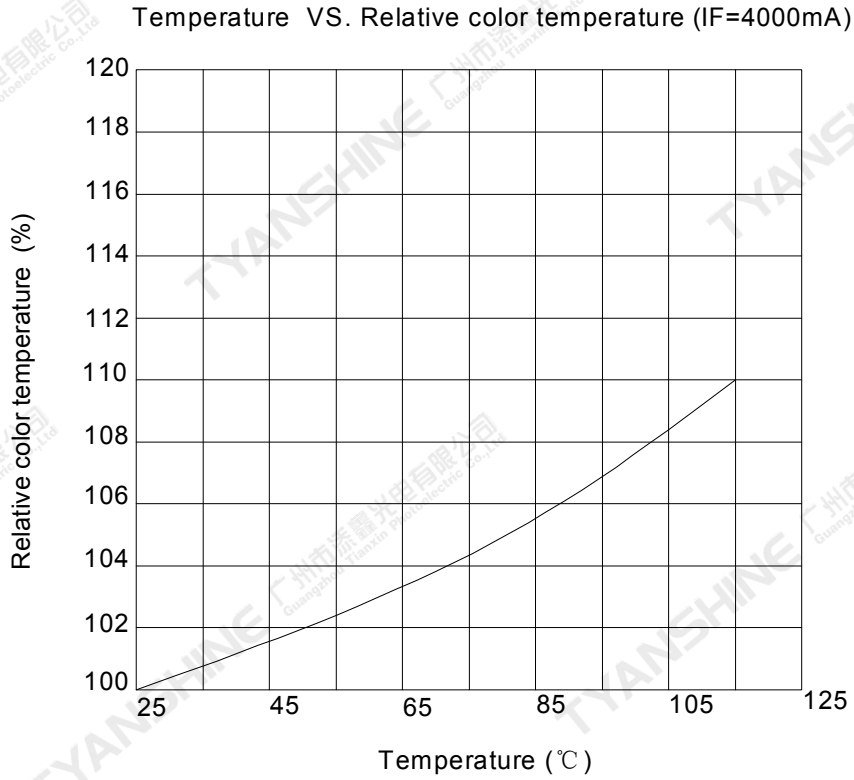

Relative Spectral Distribution

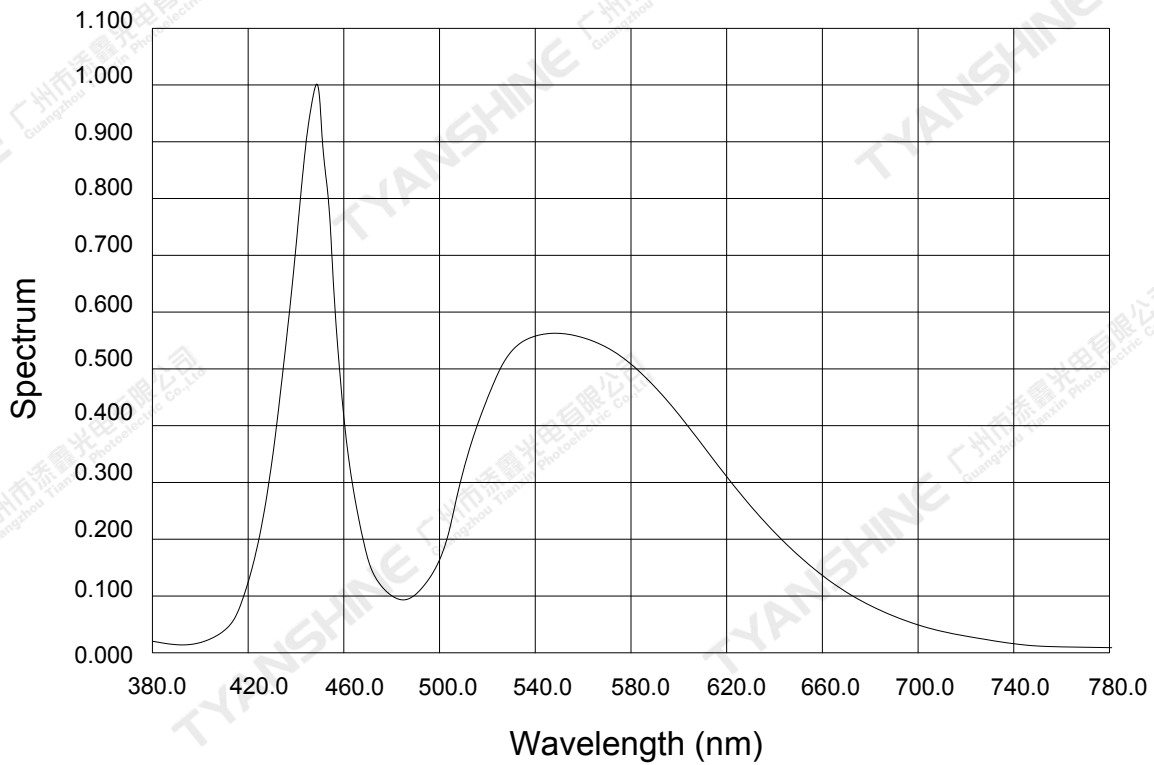

Beam Pattern

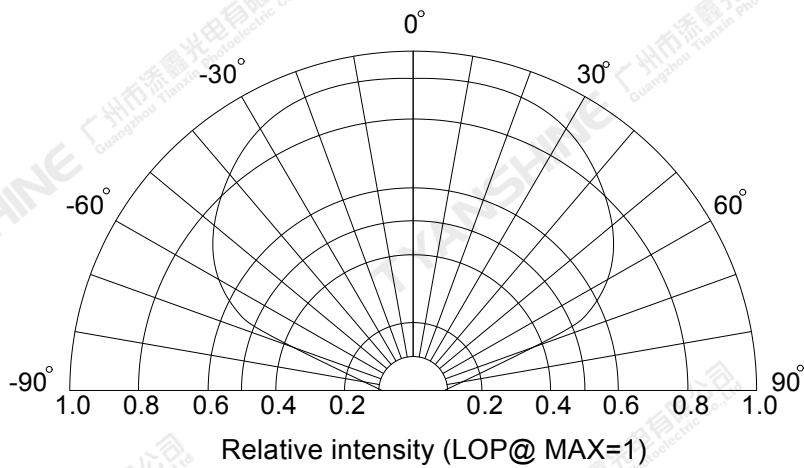

**Notes:**

1.  $2\theta_{1/2}$  is the off axis angle from lamp centerline where the luminous intensity is 1/2 of the peak value.
2. View angle tolerance is  $\pm 5^\circ$ .

Part No.	TX-6065W60FC120-NUVEZG-A01	Spec No.	WKF-BF0214	Page	7 of 9
----------	----------------------------	----------	------------	------	--------

## Usage Precautions


### Storage Environment Condition

Temperature: 5°C ~ 30°C (41°F ~ 86°F)

Humidity: 60% RH Max.

### Soldering Condition

Use the conditions shown to the under figure.

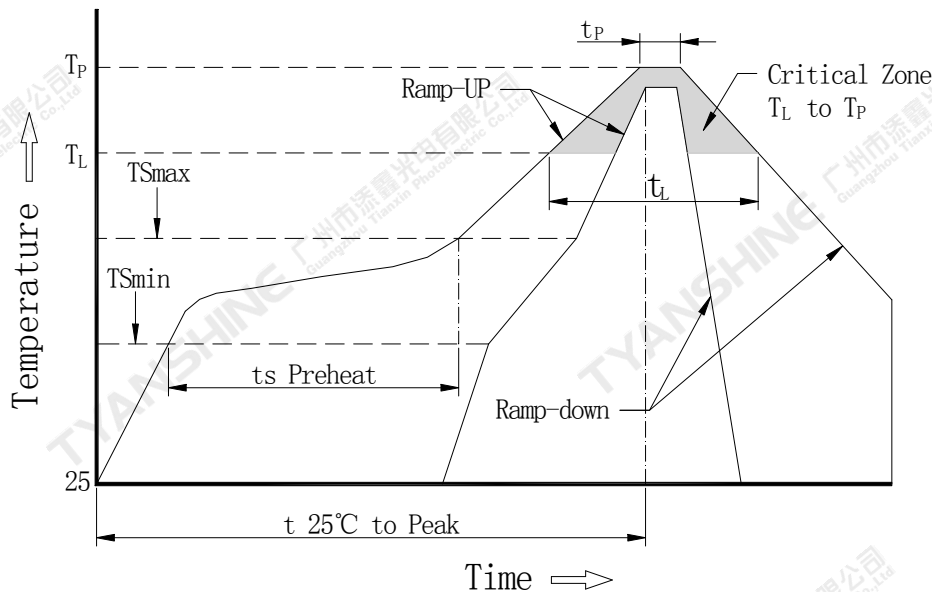

Profile Feature	Lead-Based Solder
Average Ramp-Up Rate (TSmax to TP)	3°C/second max.
Preheat: Temperature Min (TSmin)	100°C
Preheat: Temperature Max (TSmax)	150°C
Preheat: Time (TSmin to TSmax)	60-120 seconds
Time Maintained Above: Temperature (TL)	183°C
Time Maintained Above: Time (TL)	60-150 seconds
Peak/Classification Temperature (TP)	225°C
Time Within 5°C of Actual Peak Temperature (TP)	10-30 seconds
Ramp-Down Rate	6°C/second max.
Time 25°C to Peak Temperature	6 minutes max.



#### Note:

All temperatures refer to topside of the package, measured on the package body surface.



**Dimensions For Cannulation And Packaging**

**Quantity:1000PCS**

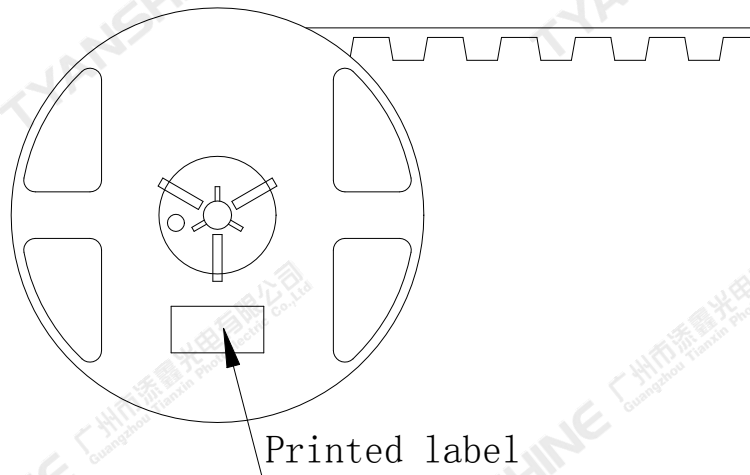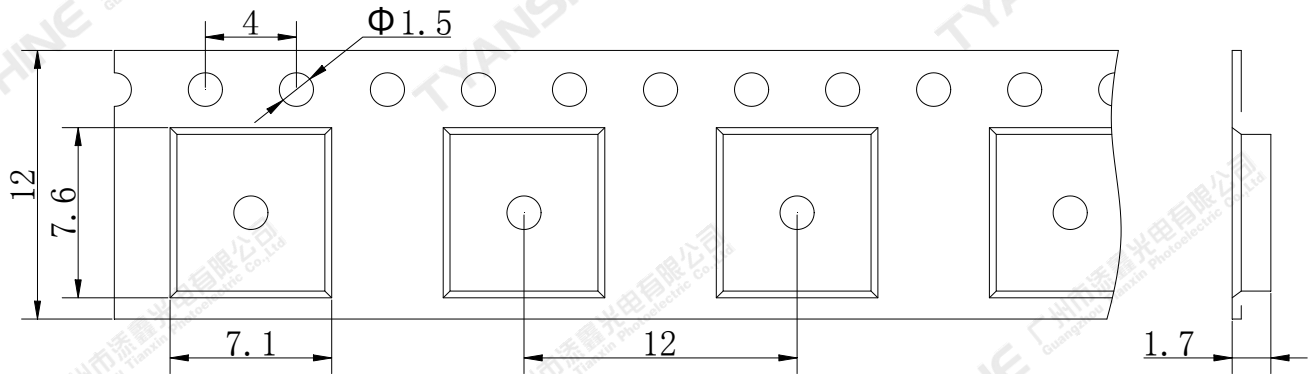

**Notes:**

1. All dimensions are in millimeters.
2. Tolerances are  $\pm 2.0$  mm unless otherwise noted.
3. The products are packaged together with silica gel, Transport, not to the weight of welding LED light-emitting area, As a result of the weight of LED light-emitting zone in the quality of, Irresponsible of the Company.

Part No.	TX-6065W60FC120-NUVEZG-A01	Spec No.	WKF-BF0214	Page	9 of 9
----------	----------------------------	----------	------------	------	--------